


The **SM2527-34HS** is a 2.5 to 2.7 GHz solid state GaAs FET amplifier designed for the Multichannel Multipoint Distribution System (MMDS) market. The output power (P1dB) is +34 dBm, the OIP3 is +47 dBm, and the Linear Gain is 33 dB. The unit uses the latest surface mount technologies to provide numerous features, while maintaining a very small size.

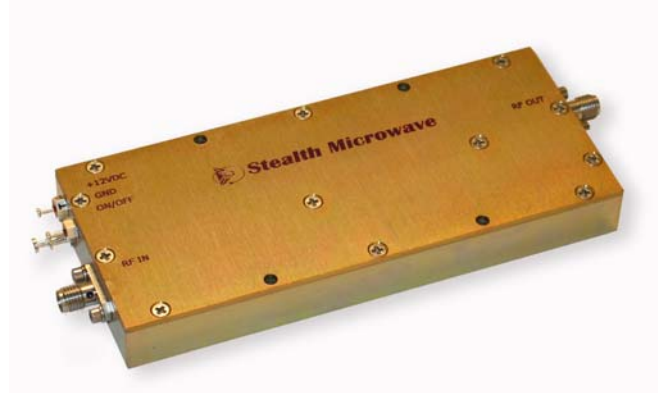

**Features**

- Over Voltage Protection
- Thermal Protection with Auto Reset

**Options**


- Single Power Supply
- Logic On/Off Control
- Heatsink

**Configurations**

- Module
- 19" Rack

Parameter	Specification
Frequency Range	2.5 – 2.7 GHz
Pout (P1dB)	+ 34 dBm
Third Order Intercept Point	+ 47 dBm (typ.)
Linear Gain	33 dB ± 1.0 dB
Gain Flatness over Full Band	± .5 dB
Input/Output Return Loss	-16 dB / -16 dB
DC Input Voltage	+10 Volts (+12 V Operation Available)
DC Input Current	1.2 Amperes (typ.) 1.4 Amperes (max.)
Mechanical Dimensions	4.7 x 2.0 x .54 inches
RF Connectors	SMA Female
Operating Temperature	0°C to +55°C
Operating Humidity	95% Non-condensing
Operating Altitude	Up to 10,000 feet above Sea Level

**DIMENSIONS IN INCHES**

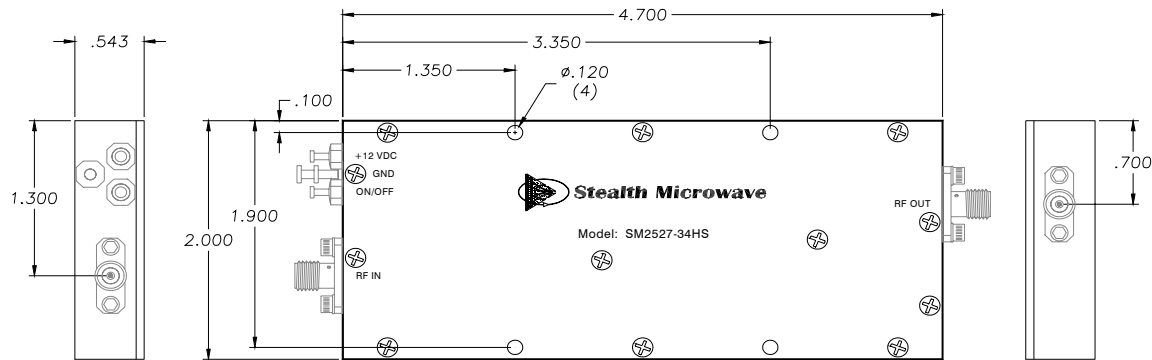

Pin	Description	Values
RF Input	Input Connector (SMA Female)	+1 dBm typ.
RF Output	Output Connector (SMA Female)	+ 34 dBm @ P1dB
GND	Ground Turret	---
+12 VDC	DC Input Voltage	+ 12 Volts @ 1.2 Amperes
On/Off	TTL Logic On/Off	0 Volts = Off, +5 Volts = On

*Specifications subject to change without notice.*